

딤 MAKEUP 'n T0 +20dB POWER OFF 0 0 (BYPASS) SOLDERED ON WIRE MIRES TO BYPASS SW OR LINK ON PCB 180K <u>erifec</u> ВВ SOLDERED MIRES ANGLED KONNECTOR METER ⊷ RATI - 8M8 1M2 1M8


HRESHOLD

-20 TO +20dB

20K LIN

(+

CONTROL PCB

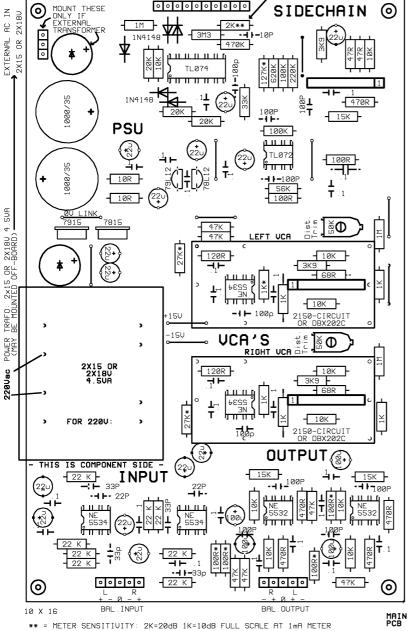

TO PANEL MOUNTED CONTROL SECTION: C B A 0 - D G E F +

DIODES 1N4148 .1 = 100nF POLY

GYRAF AUDIO 9 Date

Sub iect SSL MIXBUS COMPRESSOR CLONE CONTROL SECT: SSLK.PCB
ame: SSL.PCB Size:100x160mm Mount

Γ

0

47K* (CONTROL BOARD)USE FOR REDUCING THRESHOLD SENS. 100R* OUTPUT RESISTOR. MAY BE SMALLER WITH OUTPUT TX 27K* CHANGED FROM 15K T0 27K - UNITY GAIN

SSLK.PCB

** = METER SENSITIVITY

SIDECHAIN

REVISION HISTORY / FIXED:
REV#5: L IN + SHORTED TO GND
REV#6: 220V TRAFO: FARNELL 976-635 OR RS 209-538
REV#7: CAP VALUES AT TL074 PADS W14-94
REV#8: PAD/TRACK SPACING A/R spacing
REV#9 CHANGED TO THAT2181 UCA'S - UNITY GAIN 27K'S
(COMPONENT OVERLAY CHANGES ONLY)

